

SPECIFICATION SUBMITTAL

FlowTite[®]

R-SERIES[®]
REPLACE · REPAIR · REMODEL

Project: _____
 Architect/Engineer: _____
 Builder/Developer: _____
 Plumbing Contractor: _____



Unique *PUSHON*[®] design - Nests directly over old brass ferrule simplifying replacement, reducing cost and eliminating in-wall pipe repairs. It can also be used on a pipe without ferrule.


FlowTite[®] R-SERIES[®] Supply Stop Valve / Flexible PVC Connector System

For Copper and CPVC pipe only

Model Number	Description
<input type="checkbox"/> PO5-3,2-R	1/2" nom. supply stop valves with 3/8" or 1/4" O.D. comp.
<input type="checkbox"/> PO5LP-5,3(R-CR-RL)	With Flexible PVC connector for Faucets and Dishwashers.
<input type="checkbox"/> PO5CP-7(R)	With Flexible PVC connector for Toilets.
<input type="checkbox"/> PO5IP-2(R)	With Flexible PVC connector for Ice makers.



P05-R

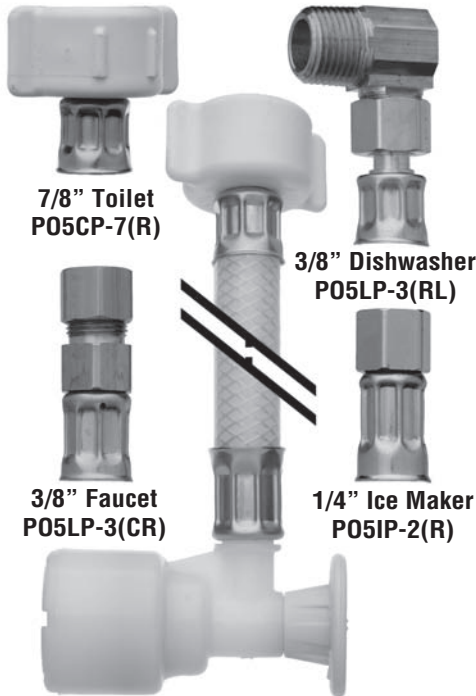

**7/8" Toilet
PO5CP-7(R)**

**3/8" Dishwasher
PO5LP-3(RL)**

**3/8" Faucet
PO5LP-3(CR)**

**1/4" Ice Maker
PO5IP-2(R)**

P05LP-5(R)

Design Features / Benefits

- 10 year limited warranty including labor and material for residential and one year for commercial.
 - Property owner protection.
 - Reduced maintenance costs.
- *PUSHON* over existing ferrule.
 - Saves time and reduces labor cost
 - Eliminates expensive in-the-wall repairs and ferrule pullers that damage pipe.
- Designed to be pushed onto copper and CPVC pipe with or without a brass compression ferrule.
 - Versatile application
 - Replaces compression, solder and glue-on valves and can be installed on new pipe.
 - Single solution for non-warranted valve replacement across property.
- Tested to 1,000 psi.
 - 10:1 margin of safety.
- Over 25 million *PUSHON* technology valve installations in over 2 million U.S. homes since 1988.
 - Long-term proven technology performance.
- Easy Pull/Push ON/OFF Handle.
 - No sticking or leaking turn handles due to dried out rubber packing.
- Original one-piece factory attached connector.
 - Reduced maintenance costs.
 - Eliminates potential leaks at joints.
- 100% non-metallic water contact.
 - No lead, no internal corrosion, no brass dezincification.
- NSF certified.
 - Health Safe.
- Clean look.
 - To fit any interior.
- Removable and Reusable.
 - Installation does not damage pipe.

Listings:

NSF 61/9 Listed
 IAPMO File 2657 (cUPC*/IPC,
 ICC-ES Legacy Report 97-54 (IPC)**CSA)
 ETL-Semko/Warnock Hersey (CSA)
 other city, county and state approvals

Manufactured in accordance with:

ANSI/NSF 61/9 Certified
 ASME A112.18.1
 ASME A112.18.6
 CSA B125